


# TOMBIGBEE ELECTRIC COOPERATIVE

## OUTSIDE WALL INSTALLATION

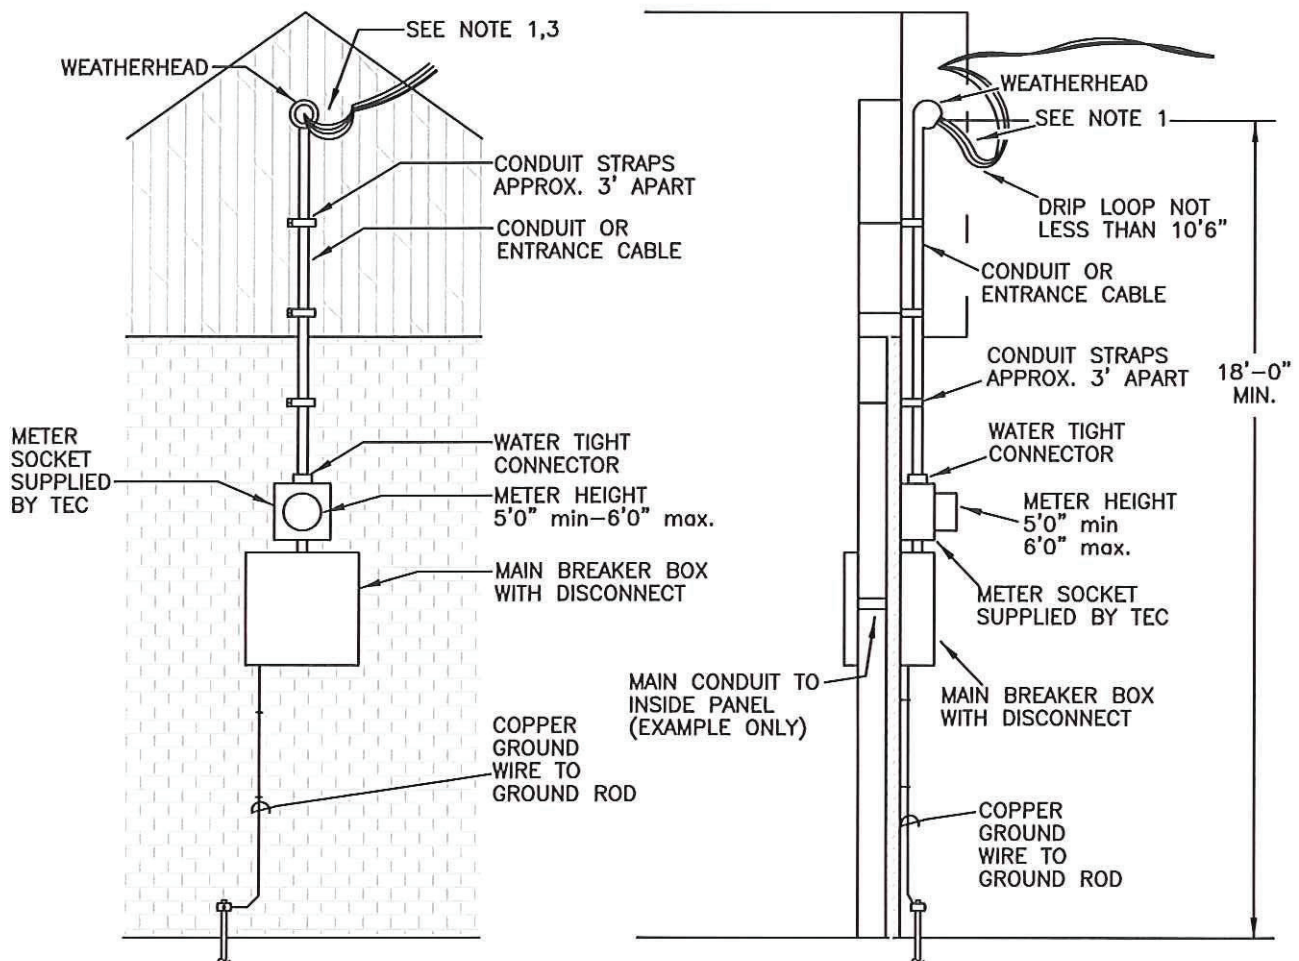

### NOTES:

1. LEAVE 24" MIN. PIGTAIL ON ENTRANCE CONDUCTOR.
2. TEC WILL DETERMINE POINT OF ATTACHMENT TO BUILDING.
3. TEC WILL SUPPLY EYEBOLT FOR MOUNTING TO BRICK, BLOCK ROCK, OR STUCCO WALLS. CUSTOMER RESPONSIBLE FOR INSTALLING.
4. LEAD PLUGS SHALL BE USED ON ALL MASONARY TYPE CONSTRUCTION TO SECURE CONDUIT STRAPS.
5. WHERE HEIGHT OF THE BUILDING DOES NOT PERMIT ITS SERVICE DROP TO MEET 18' REQUIRED OVER RESIDENTIAL DRIVEWAY, CLEARANCE MAY BE REDUCED TO 12'.